



Venus

Steel towel warmer radiator


VENUS is a termoarredo with a curved shape, ideal for inserting towels.

Technical features:

- steel towel warmer radiator with horizontal elements featuring round tubes with a 23 mm diameter
- side manifolds with a 40x30 mm semioval section
- manifold threading and central connections (50 mm) 1/2" Gas right
- maximum working pressure 8 bar
- maximum working temperature 95°C

Standard supply:

- 4 wall brackets
- air vent

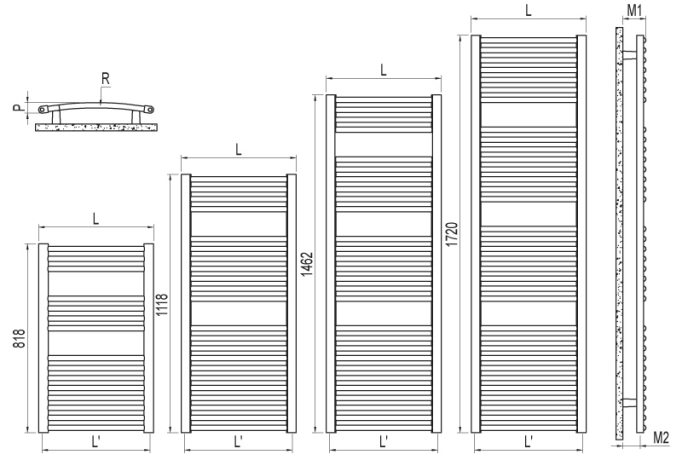

Modello	Codice	Prof. mm	Altezza mm	Largh. mm	Interass. mm	Peso mm	Cal. lt	Watt dt=50°C	Watt dt=40°C	Watt dt=30°C	Watt dt=20°C	Esp.n.	funz. misto Watt
818 - 15 rails - 2 spazi	04 X S045 01	41	818	448	418	6.13	3.33	336	257	181	111	1.207	300
818 - 15 rails - 2 spazi	04 X S050 01	45	818	497	467	6.62	3.57	366	280	198	121	1.207	400
818 - 15 rails - 2 spazi	04 X S060 01	55	818	595	565	7.60	4.05	426	325	230	141	1.206	400
818 - 15 rails - 2 spazi	04 X S075 01	74	818	740	710	9.06	4.77	515	393	278	171	1.206	400
1118 - 22 rails - 2 spazi	04 X M045 01	41	1118	448	418	8.71	4.73	480	361	251	150	1.274	400
1118 - 22 rails - 2 spazi	04 X M050 01	45	1118	497	467	9.43	5.09	526	397	276	165	1.265	400
1118 - 22 rails - 2 spazi	04 X M060 01	55	1118	595	565	10.87	5.80	617	467	326	197	1.246	700
1118 - 22 rails - 2 spazi	04 X M075 01	74	1118	740	710	13.01	6.85	753	574	404	247	1.219	700
1462 - 28 rails - 3 spazi	04 X L045 01	41	1462	448	418	11.17	6.09	617	469	330	201	1.226	700
1462 - 28 rails - 3 spazi	04 X L050 01	45	1462	497	467	12.09	6.55	676	514	361	220	1.226	700
1462 - 28 rails - 3 spazi	04 X L060 01	55	1462	595	565	13.92	7.45	793	603	424	258	1.224	700
1462 - 28 rails - 3 spazi	04 X L075 01	74	1462	740	710	16.64	8.79	968	737	519	316	1.221	1000
1720 - 34 rails - 3 spazi	04 X G045 01	41	1720	448	418	13.38	7.29	748	571	403	247	1.212	700
1720 - 34 rails - 3 spazi	04 X G050 01	45	1720	497	467	14.50	7.85	818	624	441	270	1.211	700
1720 - 34 rails - 3 spazi	04 X G060 01	55	1720	595	565	16.73	8.94	957	731	516	316	1.210	1000
1720 - 34 rails - 3 spazi	04 X G075 01	74	1720	740	710	20.03	10.57	1166	890	629	385	1.208	1000
818 - 15 rails - 2 spazi	04 X S045 01	41	818	448	418	6.13	3.33	336	257	181	111	1.207	300
818 - 15 rails - 2 spazi	04 X S050 01	45	818	497	467	6.62	3.57	366	280	198	121	1.207	400
818 - 15 rails - 2 spazi	04 X S060 01	55	818	595	565	7.60	4.05	426	325	230	141	1.206	400
818 - 15 rails - 2 spazi	04 X S075 01	74	818	740	710	9.06	4.77	515	393	278	171	1.206	400
1118 - 22 rails - 2 spazi	04 X M045 01	41	1118	448	418	8.71	4.73	480	361	251	150	1.274	400
1118 - 22 rails - 2 spazi	04 X M050 01	45	1118	497	467	9.43	5.09	526	397	276	165	1.265	400
1118 - 22 rails - 2 spazi	04 X M060 01	55	1118	595	565	10.87	5.80	617	467	326	197	1.246	700
1118 - 22 rails - 2 spazi	04 X M075 01	74	1118	740	710	13.01	6.85	753	574	404	247	1.219	700
1462 - 28 rails - 3 spazi	04 X L045 01	41	1462	448	418	11.17	6.09	617	469	330	201	1.226	700
1462 - 28 rails - 3 spazi	04 X L050 01	45	1462	497	467	12.09	6.55	676	514	361	220	1.226	700
1462 - 28 rails - 3 spazi	04 X L060 01	55	1462	595	565	13.92	7.45	793	603	424	258	1.224	700
1462 - 28 rails - 3 spazi	04 X L075 01	74	1462	740	710	16.64	8.79	968	737	519	316	1.221	1000

1720 - 34 rails - 3 espac	X G045 01	41	1720	448	418	13.38	7.29	748	571	403	247	1.212	700
1720 - 34 rails - 3 espac	X G050 01	45	1720	497	467	14.50	7.85	818	624	441	270	1.211	700
1720 - 34 rails - 3 espac	X G060 01	55	1720	595	565	16.73	8.94	957	731	516	316	1.210	1000
1720 - 34 rails - 3 espac	X G075 01	74	1720	740	710	20.03	10.57	1166	890	629	385	1.208	1000

X = I for connections at either end of the radiator; H for 50 mm connections

01 = Standard White colour code - for different colour codes see the colours page

For dt different from 50°C use the formula: $Q=Q_n (dt / 50)^n$